

Electrical Specification

Input Rated Voltage :	220 - 240Vac
Input Frequency :	50/60 Hz
Efficiency :	89.5% typ. (230Vac)
Power Factor :	0.95
Output Voltage :	143-286V, (Max. no load: 343V)
Output Current :	350mA
Output Power :	100W max.
Protection :	SCP, OVP, OTP



Environmental Characteristics

Working Temperature (ta) :	-40 ~ +55°C
IP Rating :	IP67
Max. Case Temp. (tc):	85 °C
Lifetime	50,000 hours @ta = 55°C

Safety

Product Design :	Class I (Independent type)
Regular Standard :	EN 61347-1, EN 61347-2-13
Approval Safety :	CE, CCC


EMC

Emission :	Compliance to EN 55015 Class B : EN 61000-3-2 Class C : EN 61000-3-3
Immunity :	Compliance to EN 61547, IEC 61000-4-2,3,4,5,6,8,11 (surge 4KV (L/N), 6KV (L,N/PE))

Mechanical

Dimension (L x W x H) :	250 x 60 x 34 (mm)
Input wires :	L: Brown , N: Blue, PE: Yellow/Green; length: 300mm
Output wires :	Positive: Red, Negative: Black; length: 300mm
Enclosure material	Aluminum case, color : Natural

Physical Parameters

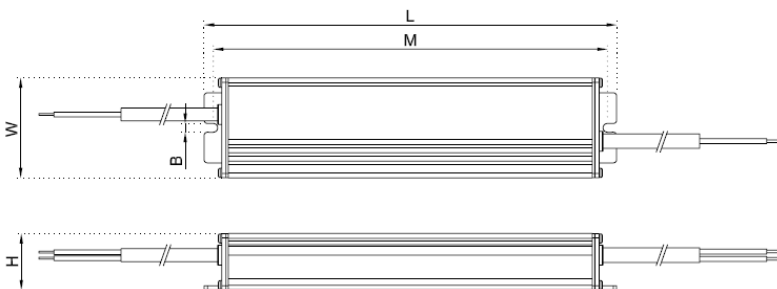

L: 250mm W: 60mm H: 34mm
 M: 239mm B: 5.2mm

