



A Donaldson Company

A WORLD LEADER IN FUME
EXTRACTION TECHNOLOGY

PureBEAUTY+

Last Updated on 13.04.2021



The complete beauty salon fume extraction system.

Clean air, fresh salon ...

The BOFA PureBEAUTY+ system has been especially designed for the hair and beauty industry to extract and remove harmful fumes and airborne dust generated in the salon environment.

The hazards associated with quick-dry nail sprays, nail varnishes and removers, as well as nail extension materials need to be assessed under the COSHH regulations. The main concern is the inhalation of dust or solvent fumes produced when using the products mentioned above.

Many of the current nail desk extractors simply recirculate the solvent laden air within the salon. The multi-layered pre and chemical filters in the BOFA PureBEAUTY+ capture all the contaminants and return clean air into the salon.

Ideal for the salon environment, the PureBEAUTY+ extraction system will fit easily into any salon, without the need to replace existing nail stations or furniture.

Technology



Advanced carbon
filter (ACF)
technology



ProTECT service
plan



SureCHECK
quality standard

Key features of the PureBEAUTY+

Pre-filter
Standard

2 x 50mm stay put extraction arm
Standard

Table brackets
Standard

20 sec overrun safety feature
Standard

Granulated carbon gas filter
Standard

Installation flex
Standard

Filter blocked indicator
Standard

Contact BOFA at <https://bofainternational.com/en/contact/>

<https://bofainternational.com/en/portal/datasheets/pure-beauty-plus/>



Technical specification

1. Hose inlet connections - 50mm


2. On / off switch

3. Unit / filter condition display



4. Power inlet

5. Exhaust outlet

6. Motor cooling inlet

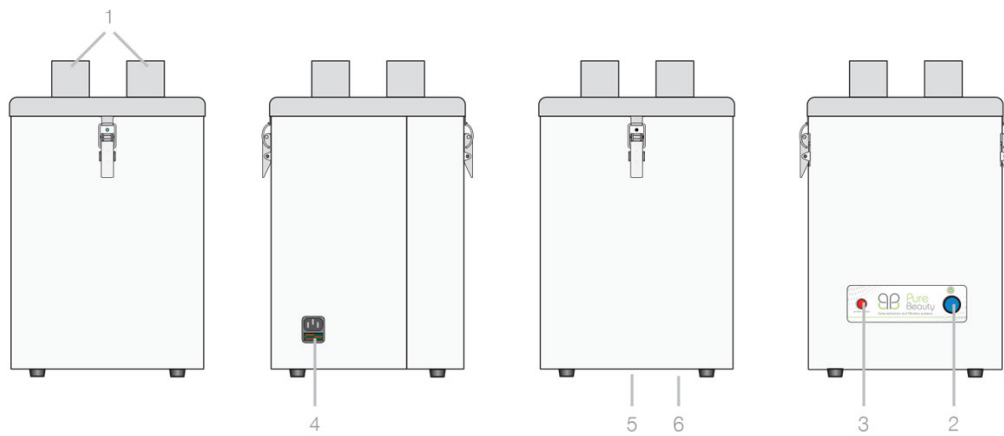

Airflow through filters

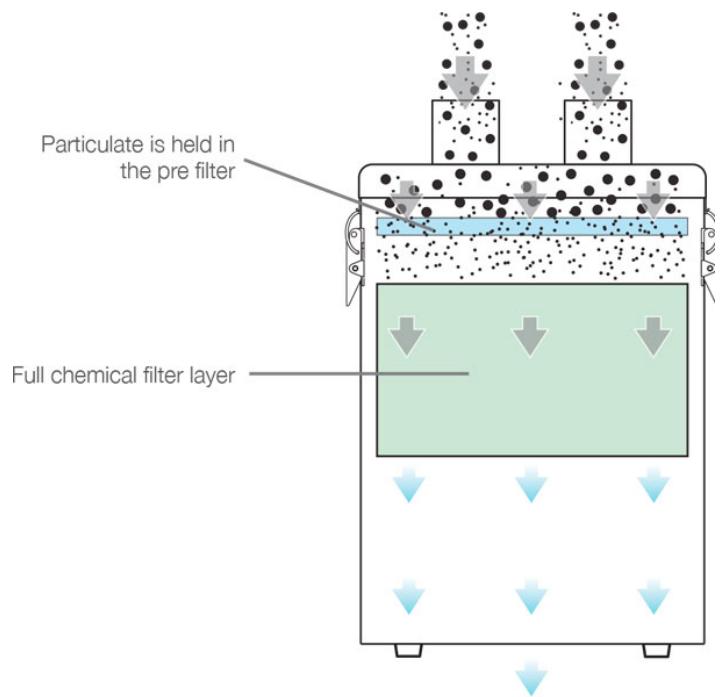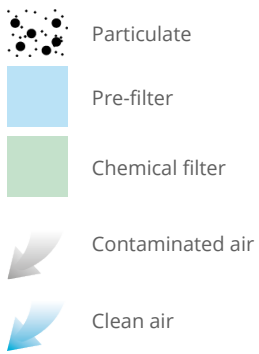

Technical data

	EU	US
Dimensions (HxWxD)	420 x 290 x 270 mm	16.54 x 11.42 x 10.63"
Cabinet construction	Powder coated mild steel	Powder coated mild steel
Airflow/ pressure	180m ³ /hr / 30mbar	106cfm / 30mbar
Electrical data	230v Single-phase 1~ 50/60Hz Full load current: 0.9 amps / 135 watts	115v 60/50Hz Full load current: 1.2 amps / 135 watts
Noise level	< 54dBA (at typical operating speed)	< 54dBA (at typical operating speed)
Weight	13.5kg	29.8lbs
Approvals	UKCA and CE	UKCA and CE

Pre-filter specifications

Filter media	Borosilicate
Filter media construction	Pad
Filter efficiency	96% @ 2 microns

MEK gas filter specifications

Filter housing	Zintec mild steel
Treated activated carbon	5kgs (11lbs)

Unit part numbers

Model	Voltage	Part no.	VOC monitoring
PureBeauty+	230V	E2042A0002	A2003
	115V	E2041A0002	A2003

Replacement filter part numbers

Model	Part no,	Combined filter
PureBEAUTY+	A1030102	A1030057

Other languages

PureBEAUTY+
[German](#)

Datasheet correct at time of publishing.

Where applicable, the carbon used in BOFA units is capable of removing a wide range of VOC's, however it is the responsibility of the user to ensure the carbon is suitable for their application. For specific applications, please contact us for details.

Think before you print! Please consider the environment before printing this document.

